


夹钳式手动小车

- 专业级技术水平；
- 通过螺纹可调节至不同的横梁宽度，调节简便；
- 带铸铁通用胎面轮可用于平面的或锥形的带翼横梁上；
- 通过转动中心杆可快速调节至横梁宽度；
- 可调节的胎面轮适用于大部分的I.S.W型横梁或者涂层的轨道；
- 对于精确测定的作业非常有效；
- 配有3米长的落链；
- 耐磨损，高强度耐磨损钢梁。

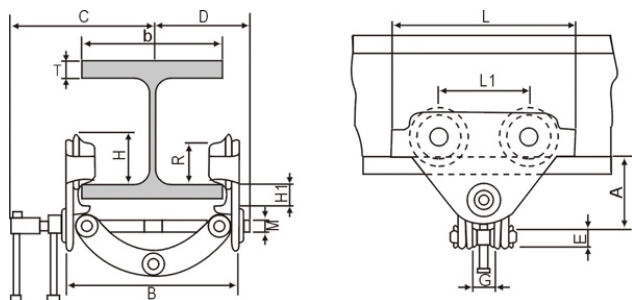

货 号		BT02159	BT02160	BT02161	BT02163
额定载重 kg		1000	2000	2000	3000
横梁宽度(b) mm		61–151	74–200	199–300	200–320
净重 kg		2.5	9.9	10.3	19.5
尺寸	A mm	81–108	89–154	135–190	150–212
	G mm	26	42	42	50
	E mm	22	20	20	22
	H1 mm	20	30	30	30.5
	H mm	53	71.5	71.5	95.5
	L mm	160	260	260	310
	L1 mm	75	130	130	150
	M mm	12	18	18	24
	R mm	46	60	60	80
	C mm	153	205	255	280
	D mm	105	139	189	215
	T(max) mm	15	25	25	25